

# Yealink Solution



# Yealink IP Phone



# IP Телефоны

Совещания



CP960-WM CP920

Руководители



T4U Series T5 Series

Места общего пользования,  
Штатные сотрудники

T3 Series



Директора компаний



T58W with camera VP59

Ресепшн, стойки  
регистраций



T48U+EXP43



HD Voice

Экономически  
эффективный

T3 Series

Basic Level Business IP Phone



Богатые  
Возможности

Gigabit

T4 Series

Ultra-elegant Business IP Phone



Всё в одном

Android OS

T5 Series

Smart Business IP Phone



Широкая  
Совместимость

Интуитивно  
понятный

Conference Phone

Easy HD Audio Conferencing

# T5 Серия



# Серия T5

Флагманский видеотелефон



VP59

Премиум смарт телефон  
бизнес класса



T58W Pro



T58W with camera

Телефон бизнес класса



T53



T53W








T54W



T57W

# Серия T5

	Yealink VP 59	Yealink SIP-T58Wwith Camera	Yealink SIP-T57W	Yealink SIP-T54W	Yealink SIP-T53W/T53
Picture					
Operating System	Android 9	Android 5.1	Linux Based	Linux Based	Linux Based
LCD	8" 1280 x 800 Capacitive Touch Screen	7" 1024X600 Capacitive Touch Screen	7" 800x480 Pixels Color Display	4.3" 480X272 pixel color display	3.7" 360x160 Pixels Graphical Display
Video Call	1080p@30FPS Full-HD	720p@30FPS HD (T58W with Camera)	X	x	x
Built-in WiFi/Bluetooth	√	√	√	√	√ (T53 via Yealink BT40/WF50/WF40)
Acoustic Shield	√	√	√	√	√
Opus	√	√	√	√	√
Corded-Cordless Phone(via DD10K)	√	√	√	√	√
Expansion Module	X	EXP50 color screen	EXP50 color screen	EXP50 color screen	EXP50 color screen

**T4 Серия**



# Серия T4



T43U






T46U



T48U



# Серия T4

	Yealink SIP-T48U	Yealink SIP-T46U	Yealink SIP-T43U
Picture			
LCD Display	7" color touch screen	4.3" color LCD	3.7" graphical LCD
GigEthernet	√	√	√
SIP Accounts	16	16	12
DSS Keys	29	27	21
N-Way Audio Conferencing	10	10	5
WiFi/Bluetooth (WF40/WF50/BT41)	√	√	√
PoE	√	√	√
USB port	2	2	2
Opus	√	√	√
EXP43	√	√	√

A group of business professionals in a modern office setting, gathered around a conference table with laptops and coffee. A woman stands in the center, smiling, while others are seated and engaged in discussion. The scene is overlaid with a semi-transparent green filter.

Т3 Серия

# Серия T3



**T30/T30P**



**T31/T31P/T31G**






**T33P/T33G**

**P** for PoE,

**G** for PoE & Gige

# Серия T3

	Yealink SIP-T33G/33P	Yealink SIP-T31G/31P/31	Yealink SIP-T30P/30
Picture			
LCD Display	2.4" color LCD	2.3" graphical LCD	2.3" graphical LCD
LCD Backlight	√(Adjustable Brightness)	√(Adjustable Brightness)	x
GigEthernet	√(T33G)	√(T31G)	x
PoE	√	√(T31P/T31G)	√(T30P)
EHS35	√	√	√
DSS Keys	4	2	0
SIP Accounts	4	2	1
N-Way Audio Conferencing	5	5	5
Opus	√	√	√
Security Slot	√	√	√

# Модули Расширения



## EXP50

Color-screen Expansion Module

- ✓ 4.3" 272x480 color screen
- ✓ 3 independent control keys with illuminated LED, 20 DSS keys with dual LED
- ✓ Work with T5X



## EXP43

Color-screen Expansion Module

- ✓ 4.3" 272x480 color screen
- ✓ 3 independent control keys with illuminated LED, 20 DSS keys with dual LED
- ✓ Work with T4U



# DECT телефоны Yealink

## Роуминг нового поколения

IP-телефоны Yealink DECT разработаны для качественной связи работников, которые находятся всё время в движении. Используются в различных отраслях промышленности, таких как складские комплексы, общественное питание и розничная торговля. Они оснащены надежным оборудованием и идеально подходят для предприятий, которым требуются большие возможности для обработки большой нагрузки вызовов.



### User Benefits

- Элегантный промышленный дизайн
- Беспроводное подключение
- Отличная производительность батареи
- Беспроводное обновление
- Поддержка решения с несколькими ячейками до 10 DM / 60 баз / 2500 параллельных вызовов / 2500 телефонных трубок / 2500 учетных записей SIP
- Поддержка настольного телефона DECT
- Простое развертывание, гибкое управление

# Беспроводные DECT телефоны и базовые станции



W70B

Up to **10** handsets  
 Up to **10** SIP accounts  
 UP to **20** concurrent calls




W60B








Up to 8 handsets  
 Up to 8 SIP accounts  
 UP to 8 concurrent calls

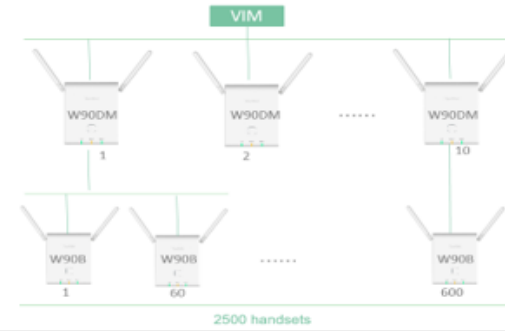Specification		W70B/W60B		Specification		W70B/W60B	
Repeaters per base station (RT30) Indoor/outdoor range		6 50m/300m		PoE		✓	
Wideband Codec		G.722/Opus/AMR-WB(optional)		XML browser Supported Directory		✓ XML/LDAP/Remote Phonebook/PBX directories	
Backup System		✓		TLS & SRTP security encryption OTA for handset		✓ ✓	
<b>W53H</b>	<b>W56H</b>	<b>W59R</b>	<b>W73H</b>	<b>CP930W</b>	<b>DD Phone (T54W+DD10K)</b>	<b>DD Phone (T41S/T42S+DD10K)</b>	<b>RT30</b>
1.8" 128 x 160 TFT colour display	2.4" 240 x 320 TFT colour display	1.8" 128x160 TFT color screen	1.8" 128x160 TFT color screen	3.1" 248x120-pixel graphical LCD with backlight	4.3" 480 x 272-pixel color display with backlight	2.7" 192x64-pixel graphical LCD with backlight	Up to 6 repeaters per base station
200h Standby Time 18h Talk Time 3.5 mm headset 3-way Conferencing	400h Standby Time 30h Talk Time 3.5 mm headset 3-way Conferencing	360h Standby Time 28h Talk Time Built-in Bluetooth <b>Alarm button</b>	400h Standby Time 35h Talk Time 3.5 mm headset 3-way Conferencing	360h Standby Time 24h Talk Time Built-in Bluetooth <b>5-way Conference Call</b>	USB headset 3-way Conferencing <b>Up to 6 BLF keys</b>	USB headset 3-way Conferencing (Only W60B support)	Indoor range 50m Outdoor range 300m Auto association Plug & play setup Up to 2 repeaters can be arranged in cascade
		<b>IP67 standard certified</b> <b>Shock Resistant</b> <b>Water Resistant</b> <b>Dust Resistant</b>	<b>Support FNR (Flex Noise Proof)</b>	<b>Built-in 3-microphone Array</b> <b>Noise Proof</b>			



# Беспроводные DECT телефоны и базовые станции







Specification	W80 Multi-Cell System	W90 Multi-Cell System	VIM			
Air Sync		✓				
LAN Sync	x	✓	✓			
Simultaneous calls for system	100	250	2500			
Max. number of bases for system	30	60	600 (60 bases per DM)			
Max. number of handsets for system	100	250	2500			
Max. number of accounts for system	100	250	2500			
Auto Sync Level	x	✓	✓			
External antenna	x	✓	✓			
Broadsoft/3CX/XML/LDAP/Remote Phonebook XSI Directory/XSI Call Log		✓				
Indoor/outdoor range		50m/300m				
IP Discovery tool		✓				
Wall mountable		✓				
						
<b>W53H</b>	<b>W56H</b>	<b>W59R</b>	<b>W73H</b>	<b>CP930W</b>	<b>DD Phone (T54W+DD10K)</b>	<b>DD Phone (T41S/T42S+DD10K)</b>
1.8" 128 x 160 TFT colour display	2.4" 240 x 320 TFT colour display	1.8" 128x160 TFT color screen	1.8" 128x160 TFT color screen	3.1" 248x120-pixel graphical LCD with backlight	4.3" 480 x 272-pixel color display with backlight	2.7" 192x64-pixel graphical LCD with backlight
200h Standby Time	400h Standby Time	360h Standby Time	400h Standby Time	360h Standby Time	USB headset	USB headset
18h Talk Time	30h Talk Time	28h Talk Time	35h Talk Time	24h Talk Time	3-way Conferencing	3-way Conferencing
3.5 mm headset	3.5 mm headset	Built-in Bluetooth	3.5 mm headset	Built-in Bluetooth	Up to 6 BLF keys	
3-way Conferencing	3-way Conferencing	Alarm button	3-way Conferencing	5-way Conference Call	VIM not supported	
		IP67 standard certified	Support FNR (Flex Noise Proof)	Built-in 3-microphone Array		
		Shock Resistant		Noise Proof		
		Water Resistant				
		Dust Resistant				

A group of business professionals are gathered around a conference table in a modern office setting. Several individuals are seated at the table, each with a laptop open in front of them. One woman stands in the center of the group, smiling. The room features large windows in the background, providing a view of a cityscape. The entire image is overlaid with a semi-transparent green filter.

Гарнитурь Yealink

# Гарнитуры Yealink

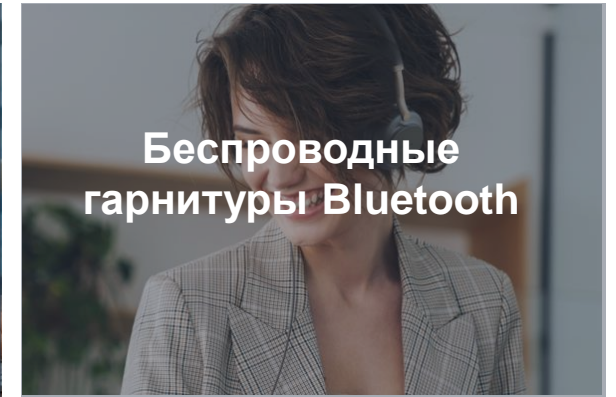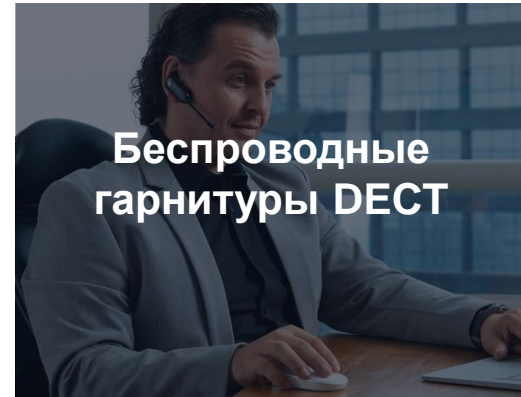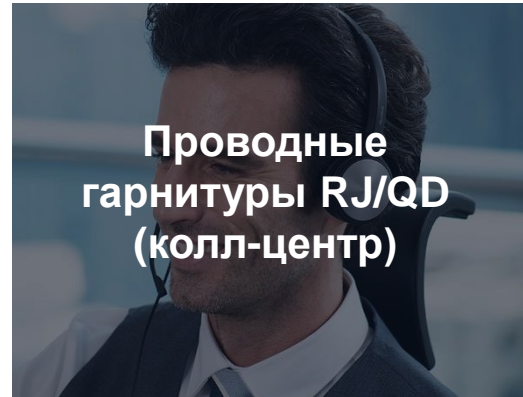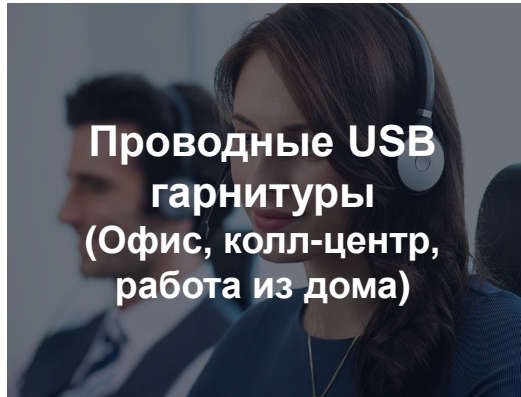

UH34/UH34 Lite

UH36



YHS34/YHS34 Lite



WH62



WH63



BH72 Lite Black/Gray



BH72 with Charging Stand Black/Gray



UH38



YHS36



WH66



WH67



BH76 Black/Gray



BH76 with Charging Stand Black/Gray

**Спасибо!**